




VELCRO COMPANIES TOGETHER COMPRISE A TECHNOLOGY-DRIVEN, GLOBAL ORGANIZATION PROVIDING FASTENING SOLUTIONS THAT SOLVE PROBLEMS IN SIMPLE, ELEGANT AND SURPRISING WAYS FOR BUSINESSES AND CONSUMERS AROUND THE WORLD.

WITH MORE THAN 50 YEARS OF EXPERIENCE, VELCRO COMPANIES IS PROUD OF OUR HERITAGE IN INNOVATION. VELCRO BVBA OWNS OVER 400 ACTIVE PATENTS AND NUMEROUS TRADEMARKS, INCLUDING THE VELCRO® MARK WHICH IS REGISTERED THROUGHOUT THE WORLD.



**CONSTRUCTION
DIVISION**

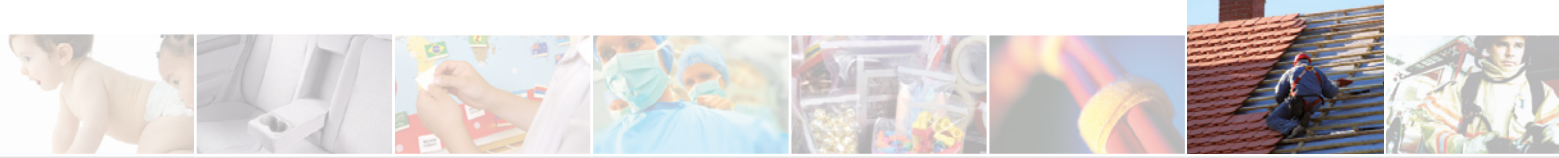

Global Services Office

Velcro Group Corporation
265 Franklin Street – 19th floor
Boston – MA 02110
USA
Tel: (+617) 946 5501
Velcro.com

USA

Velcro USA Inc.
Tel: (+800) 225 0180
marketing@velcro.com
Velcro.com

Canada

Velcro Canada Inc.
Tel: (+800) 683 5276
canada@velcro.com
Velcro.com

Mexico

Velcro de México, S.A. de C.V.
Tel: (+52) 55 5005 3300
velcrodemexico@velcro.com
Velcrodemexico.com

Brazil

Velcro Brasil Ltda.
São Paulo
Tel: (+55) 11 4195 6644
contato@velcro.com
Velcro.com.br

Uruguay

Sapiranga
Tel: (+55) 51 3599 1483
contato@velcro.com
Velcro.com.br

Velcro Industrial
del Uruguay S.A.
Tel: (+598) 2288 0008
infovurg@velcro.com
Velcro.com

Spain

Velcro Europe S.A.
Tel: (+34) 93 758 32 98
infovesa@velcro.com
Velcro.es

Germany

Velcro GmbH
Stuttgart
Tel: (+49) 7141 991 19-0
infovgmbh@velcro.com
Velcro.de

France

Gronau
Tel: (+49) 2562 96 45-0
info@alfatex-klettverschluss.de
Alfatex-klettverschluss.de

Velcro Industries France S.A.S.
Tel: (+33) 1 34 38 78 88
infovif@velcro.com
Velcro.fr

Belgium

Alfatex N.V.
Tel: (+32) 9 386 12 18
info@alfatex.be
Alfatex.be

Italy

Velcro Italia, S.R.L.
Tel: (+39) 039 62 70 01
infoveit@velcro.com
Velcro.it

UK

VIL Ltd.
Tel: (+44) 1606 73 88 06
infov ltd@velcro.com
Velcro.co.uk

Poland

Alfatex Sp. z o.o.
Tel: (+48) 71 798 57 89
info@alfatex.pl
Alfatex.pl

Australia

Velcro Australia Pty. Ltd.
Tel: (+61) 3 9703 2466
sales@velcro.com.au
Velcro.com.au

China

Velcro China Fastening
Systems Company Limited
Tel: (+86) 21 6045 2090
(Shanghai Sales Office)
chinamarketing@velcro.com
Velcro.com.cn

Hong Kong

Velcro Hong Kong Ltd.
Tel: (+852) 2570 3698
hkenquiry@velcro.com
Velcro.com.hk

VELCRO COMPANIES AROUND THE WORLD



VELCRO® Brand
Trade Range



AMAZING CONNECTIONS®... THE SMART WAY TO CONNECT THIS TO THAT

- GENERAL PURPOSE
- HIGH PERFORMANCE
- STRAPS & TIES



GENERAL PURPOSE

STRAPS & TIES

GENERAL PURPOSE

GENERAL PURPOSE ADHESIVE

ONE-WRAP® Tape



PRODUCT INFORMATION

APPLICATIONS	Tools, wall frames		Tools, wall frames		Networks, electrical, air conditioned, ducts
WIDTH	20 mm	50 mm	20 mm	50 mm	30 mm
QUANTITY	25 meters of Hook tape 25 meters of Loop tape		25 meters of Hook tape 25 meters of Loop tape		25 meters of Self-engaging tape
COLOR					
INCLUDES ADHESIVE	✗		✓		✓
CAN BE NAILED, STAPLED, SCREWED	✓		✓		✓
ADHESIVE STRENGTH	-		3.2 Kg (10 cm of tape)	8 Kg (10 cm of tape)	-
ADHESIVE OPERATING TEMPERATURE	-		-15°C to +90°C		-

CLOSURE INFORMATION

MATERIAL	Polyamide	Polyamide	Polypropylene
CYCLE LIFE	High	High	High
PEEL	1.75 N/cm	1.75 N/cm	1.8 N/cm
SHEAR	9.5 N/cm ²	9.5 N/cm ²	32 N/cm ²
TENSION	4,5 N/cm ²	4,5 N/cm ²	-

ADHESIVE SUBSTRATE COMPATIBILITY

Aluminium Anodised	-	✓	-
Glass	-	✓	-
Painted Wallboard	-	✓	-
Plywood	-	✓	-
Polyester	-	✓	-
Polyethylene	-	✓	-
Polypropylene	-	✓	-
Stainless Steel	-	✓	-
Vinyl	-	✗	-
Formica (Polished side)	-	✓	-
Cardboard	-	✓	-
Polyacrylic	-	✓	-
Fabrics	-	✓	-

✓ Recommended ✓ Good ✗ Not recommended



Ideal temperature from 18°C to 20°C
Relative humidity from 40% to 60%



Clean the surface

HIGH PERFORMANCE



PRODUCT INFORMATION

APPLICATIONS	PVC floor, carpet floor, sound panels, cable duct		Kitchen and bathroom accessories, office boards, gym wall pads	Ceiling lights, insulation panels, wood panels, ceiling panels	Partition wall, decorative panels, wall cladding	Compatible with most of the flexible floors with receptive backing (Carpet, PVC...)
WIDTH	20 mm	50 mm	50 mm	50 mm	50 mm	45 mm
QUANTITY	25 meters of Hook tape 25 meters of Loop tape		25 meters of Hook tape 25 meters of Loop tape	25 meters of Hook tape 25 meters of Loop tape	25 meters of Hook tape 25 meters of Loop tape	25 meters of Hook tape
COLOR						
INCLUDES ADHESIVE	✓		✓	✓	✓	✓
CAN BE NAILED, STAPLED, SCREWED	✓		✓	✓	✓	✗
ADHESIVE STRENGTH	3.2 Kg (10 cm of tape)	8 Kg (10 cm of tape)	8 Kg (10 cm of tape)	8 Kg (10 cm of tape)	8 Kg (10 cm of tape)	-
ADHESIVE OPERATING TEMPERATURE	-15°C to +60°C		-15°C to +90°C	-20°C to +120°C	-15°C to +90°C	-40°C to +140°C

CLOSURE INFORMATION

MATERIAL	Polypropylene, polyamide	Polyamide	Polyamide	Polyester, polypropylene, polyamide	Polypropylene
CYCLE LIFE	Medium	Medium	Medium	Low	-
PEEL	2 N/cm	6 N/cm	6 N/cm	24 N/cm	-
SHEAR	30 N/cm ²	31 N/cm ²	31 N/cm ²	115 N/cm ²	-
TENSION	10 N/cm ²	9 N/cm ²	9 N/cm ²	11 N/cm ²	-

ADHESIVE SUBSTRATE COMPATIBILITY

Aluminium Anodised	✓	✓	✓	✓	✓
Glass	✓	✓	✓	✓	✓
Painted Wallboard	✓	✓	✓	✓	✓
Plywood	✓	✓	✓	✓	✓
Polyester	✓	✓	✓	✓	✓
Polyethylene	✓	✓	✗	✓	✗
Polypropylene	✓	✓	✗	✓	✗
Stainless Steel	✓	✓	✓	✓	✓
Vinyl	✗	✗	✓	✗	✓
Formica (Polished side)	✓	✓	✓	✓	✓
Cardboard	✓	✓	✓	✓	✓
Polyacrylic	✓	✓	✓	✓	✓
Fabrics	✓	✓	✓	✓	✓

Recommended
 Good
 Not recommended

