

VELCRO® Brand

ALFA-LOK® Fastener with SilverTape® 5345 General Purpose






Features

- Free positionable, re-closable fastening system
- High Performance double sided acrylic foam tape
- Suitable for high and medium surface energy material such as glass, metals and several plastics


Compatibility Surfaces

SUBSTRATES	VELCRO® Brand ALFA-LOK® Fastener
GLASS	+
ALUMINUM (ANODIZED, RAW)	+
STEEL (STAINLESS, GALVANIZED)	+
PLYWOOD/MDF	+
FORMICA (POLISHING SIDE)	+
CARDBOARD	+
PAINTED WALLBOARD	+
CONCRETE	+* (1)
STONE	+* (1)
ABS	+
POLYESTER	+
VINYL	+
POLYACRYLIC/PMMA	+
POLYCARBONATE	+
POLYETHYLENE	-
POLYPROPYLENE	-
FABRICS	-

Performance Specifications

Testing	Minimum Value
BASE MATERIAL	Modified Solvent based Acrylic Polymer
ADHESIVE COLOUR	White
 TEMPERATURE RANGE OF USE	Long Term: From -40 °C to +90 °C Short Term: 120 °C
 PEEL 180° ADHESION (FINAT-FTM 01) (AVERAGE)	11 N/cm * 14 N/cm * - (after 24 h)
SOFTENING POINT	90 °C
 STATIC SHEAR (ASTM 3654)**	1,000 gr. at 22 °C 500 gr. at 66 & 93 °C
TACK	Medium/Low
APPLICATION METHOD	Pressure
APPLICATION	High and medium surface energy, general use

* Average according typical values.
The specifications are as a reference and are pending to confirm.
** Weight that ½ square inch will hold 10,000 minutes (7 days).

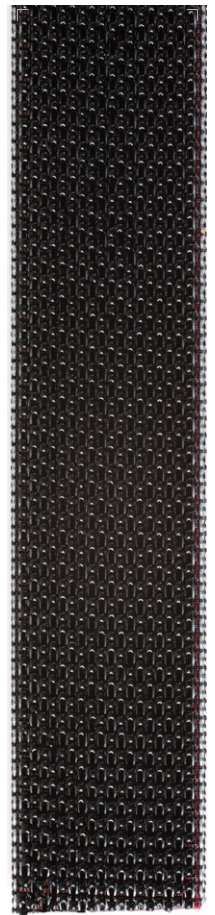

- Not Recommended + Recommended +* (1) Recommended with AFTC 101 Primer




PRODUCT USE. The information, statements and comments contained within this document are based on our experience and testing and are believed to be accurate. However, because there are many factors involved in specific applications that can impact end use and performance, product users should always test the product for its ability to meet the requirements of their specific use and method of application.

VELCRO® Brand

ALFA-LOK® Fastener Closure Characteristics



SELF-ENGAGING MUSHROOM

CHARACTERISTICS	VELCRO® Brand ALFA-LOK® Tape
DENSITY	48 heads/cm ²
CONSTRUCTION	Woven quadrilobal mushroom tape
BASE MATERIAL	Base: Polyester
	Mushrooms: Polypropylene
FASTENER	Self-engaging
CYCLE LIFE	-
 PEEL STRENGTH (AVERAGE)	2 N/cm
 SHEAR STRENGTH (AVERAGE)	50 N/cm ²
 TENSILE DISENGAGEMENT (AVERAGE)	40 N/cm ²
STANDARD COLOURS	Black
STANDARD WIDTHS	25mm
STANDARD PUT-UPS	25m rolls with flanges
	Cut pieces (customized)



GLOBAL OFFICES

Global Corporate Headquarters

Velcro USA Inc.
95 Sundial Avenue
Manchester, NH 03103
USA
Tel: (+1) 800 225 0180
marketing@velcro.com
Velcro.com

NAM

USA

Velcro USA Inc.
Tel: (+1) 800 225 0180
marketing@velcro.com
Velcro.com

Canada

Velcro Canada Inc.
Tel: (+1) 800 683 5276
canada@velcro.com
Velcro.com

LATAM

Mexico

Velcro de México, S.A. de C.V.
Tlalnepantla de Baz,
Edo. de México
Tel: (+52) 55 5005 3300
infovdmex@velcro.com
Velcrodemexico.com

León, Gto
Tel: (+52) 477 980 0630
infovdmex@velcro.com
Velcrodemexico.com

Brazil

Velcro Brasil Importação,
Exportação e Comércio de
Sistemas de Fixação Ltda.

Campo Bom, RS
Tel: (+55) 51 3599 1483
infovbra@velcro.com
Velcro.com.br

Sumaré, SP
Tel: (+55) 11 3197 2588
infovbra@velcro.com
Velcro.com.br

Uruguay

Velcroindustrial
del Uruguay S.A.
Tel: (+598) 2288 0008
infovurg@velcro.com
Velcro.com

EMEA

Spain

Velcro Europe S.A.
Tel: (+34) 93 758 32 98
infovesa@velcro.com
Velcro.es

Germany

Velcro GmbH
Freiberg am Neckar
Tel: (+49) 7141 991 19-0
infovgmbh@velcro.com
Velcro.de

Gronau
Tel: (+49) 2562 96 45-0
infovgmbh@velcro.com
Velcro.de

France

Velcro Industries France S.A.S.
Tel: (+33) 1 34 38 78 88
infovif@velcro.com
Velcro.fr

Belgium

Alfatex N.V.
Tel: (+32) 9 386 12 18
infofbe@velcro.com
Velcro.be

Italy

Velcro Italia, S.R.L.
Tel: (+39) 039 62 70 01
infoveit@velcro.com
Velcro.it

UK

Velcro Ltd.
Tel: (+44) 1606 738 806
infovlt@velcro.com
Velcro.co.uk

Poland

Velcro Poland Sp. z o.o.
Tel: (+48) 71 798 57 89
infovpl@velcro.com
Velcro.pl

APAC

Australia

Velcro Australia Pty. Ltd.
Tel: (+61) 3 9703 2466
infovaus@velcro.com
Velcro.com.au

China

Velcro China Fastening
Systems Company Limited
Tel: (+86) 21 6045 2090
(Shanghai Sales Office)
infovch@velcro.com
Velcro.com.cn

Hong Kong

Velcro Hong Kong Ltd.
Tel: (+852) 2570 3698
infovhk@velcro.com
Velcro.com.hk
Velcro.kr

Vietnam

Velcro Vietnam Company Limited
Tel: (+84) 274 2222 497
infovvn@velcro.com
Velcro.vn